

AXIS T95A Series Dome Housing

Protect your Axis PTZ and PTZ dome network cameras.



- > Heaters and power supply included
- > Indoor and outdoor
- > IP66-rated protection
- > Operating conditions down to -30 °C (-22 °F)

AXIS T95A Series Dome Housing has a top opening system designed to give easy access to the camera, all cabling and connections, enabling comfortable installation and easy maintenance of the network camera.

The AXIS T95A series is an innovative and rugged dome housing made of die-cast aluminum which protects Axis PTZ and PTZ dome network cameras from water, dust, sunlight and low temperatures.

The housing is suitable for both indoor and outdoor installation with IP66 weatherproof protection rating.

AXIS T95A is supplied with a removable sunshield, fan-assisted heaters and power supply for all supported Axis network cameras. The package includes a clear and a smoked dome bubble with superior optical clarity, designed for cameras with 35x zoom.

The pre-mounted heaters, fans and power supply allow the cameras to operate in temperatures down to -30 °C (-22 °F).




Technical specifications – AXIS T95A Series Dome Housing

General	
Models	AXIS T95A00 Dome Housing (5010-001) AXIS T95A10 Dome Housing (5010-101)
Supported cameras	AXIS 213 PTZ, AXIS 214 PTZ, AXIS 215 PTZ, AXIS 231D+, AXIS 232D+ and AXIS 233D Network Cameras
Casing	Die-cast aluminum Epoxypolyester powder painting. Color: White grey RAL9002 Removable sunshield in ABS. Color: White grey RAL9002
Power	AXIS T95A00 Input 100/240 V AC, 50/60 Hz Output 24 V DC, max 1,5 A or 12 V DC, 3 A AXIS T95A10 Input 24 V AC Output 24 V AC or 12 V DC, 2 A
Environment	Indoor/outdoor
Operating conditions	AXIS 213 PTZ: -20 to 35 °C (-4 to 95 °F) AXIS 214 PTZ: -25 to 40 °C (-13 to 104 °F) AXIS 215 PTZ: -25 to 40 °C (-13 to 104 °F) AXIS 231D+/232D+: -20 to 50 °C (-4 to 122 °F) AXIS 233D: -30 to 45 °C (-22 to 113 °F)
Protection rating	IP66 according to EN 60529
Approvals	CE according to EN 61000-6-3, EN 60950, EN 50130-4
Height (with sunshield)	335 mm (13.2")
Diameter (with sunshield)	351 mm (13.8")
Height (without sunshield)	335 mm (13.2")
Diameter (without sunshield)	322 mm (12.7")
Weight	3.8 kg (8.3 lb.)
Accessories (included)	Sunshield, thermostat controlled heaters and blower, power supply for Axis network cameras, smoked and clear dome bubble, Installation Guide

More information and a configuration tool is available at
www.axis.com/accessories

Dimensions

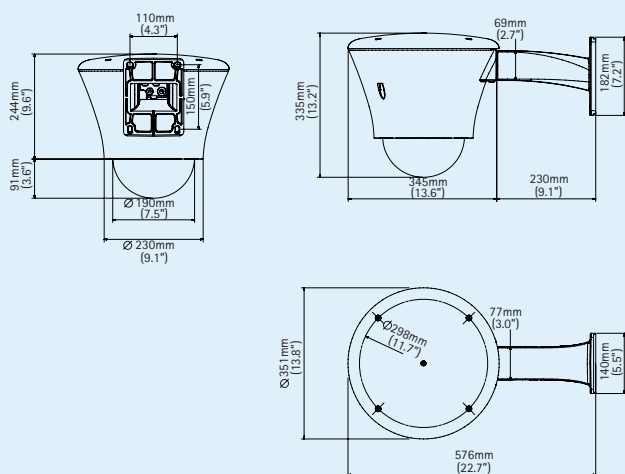

Brackets

Wall bracket Ceiling/parapet bracket Extension bracket



Bracket accessories

Base bracket Corner bracket Pole bracket

